

Type 3374

Electric Actuator with Smart Positioner

The SAMSON logo consists of the word "SAMSON" in a white, sans-serif font, centered within a black circle. This circle is itself centered within a white square frame.

SAM DISTRICT ENERGY

Smart and Powerful for Energy-saving Networks

- Selectable actuator control and process control
- Easy to start up
- Convenient to operate
- Various diagnostic functions
- Optional RS-485 interface
- **NEW:** Version with increased thrust (5000 N)

Version with increased thrust

- Suitable for Series 240 Valves
- Suited for high pressure drops



SAM[®]
DIGITAL


SMART IN FLOW CONTROL

Type 3374

Electric Actuator with Smart Positioner



Electric actuator		Type 3374
Rated travel		15 or 30 mm
Stroking speed		0.25 or 0.5 mm/s, adjustable
Thrust		2 to 5 kN
Torque-dependent limit switches		For both end positions
Power supply		24 V AC/DC or 85 to 264 V AC
Degree of protection		IP 65 with cable glands (otherwise IP 54)
Actuators can be combined with valve models	Type 3241	DN 15 to 150 (see Data Sheet T 5870)
	Type 3244	DN 15 to 150 (see Data Sheet T 5870)
	Type 3260	DN 65 to 150 (see Data Sheet T 5861)
	Type 3214	DN 65 to 250 (see Data Sheet T 5868)
	Type 3321	DN 15 to 100 (see Data Sheet T 8111)
	Type 3323	DN 15 to 100 (see Data Sheet T 8113)
	Type 3531	DN 15 to 80 (see Data Sheet T 8131)
	Type 3535	DN 15 to 80 (see Data Sheet T 8135)
Options		<ul style="list-style-type: none"> ▪ Mechanical or electronic limit contacts ▪ RS-485 interface for Modbus-RTU communication ▪ Free TROVIS-VIEW software for configuration and operation (see Data Sheet T 6661 for accessories) ▪ Suitable for connection to the SAM DISTRICT ENERGY web portal

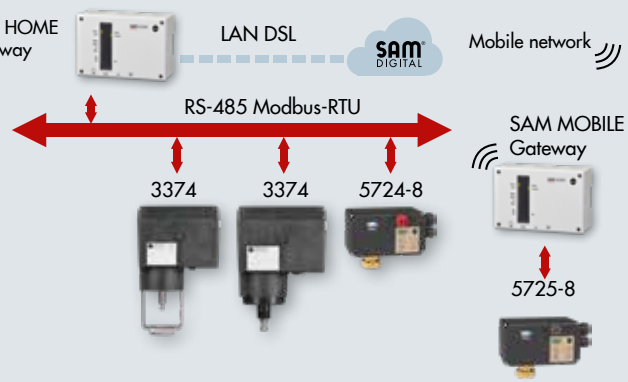

SAMSON AKTIENGESELLSCHAFT

Weismuellerstrasse 3 · 60314 Frankfurt am Main, Germany
 Phone: +49 69 4009-0 · Fax: +49 69 4009-1507
 E-mail: samson@samsongroup.com
 Internet: www.samsongroup.com